

VALMATIC®

QuadroSphere®


Trunnion Mounted Ball Valves



www.valmatic.com

Feature Highlights

The QuadroSphere® Ball Valve has over 15 years of proven performance in numerous applications in the power, oil & gas, refinery, mining, steel, chemical, geothermal and petrochemical industries.

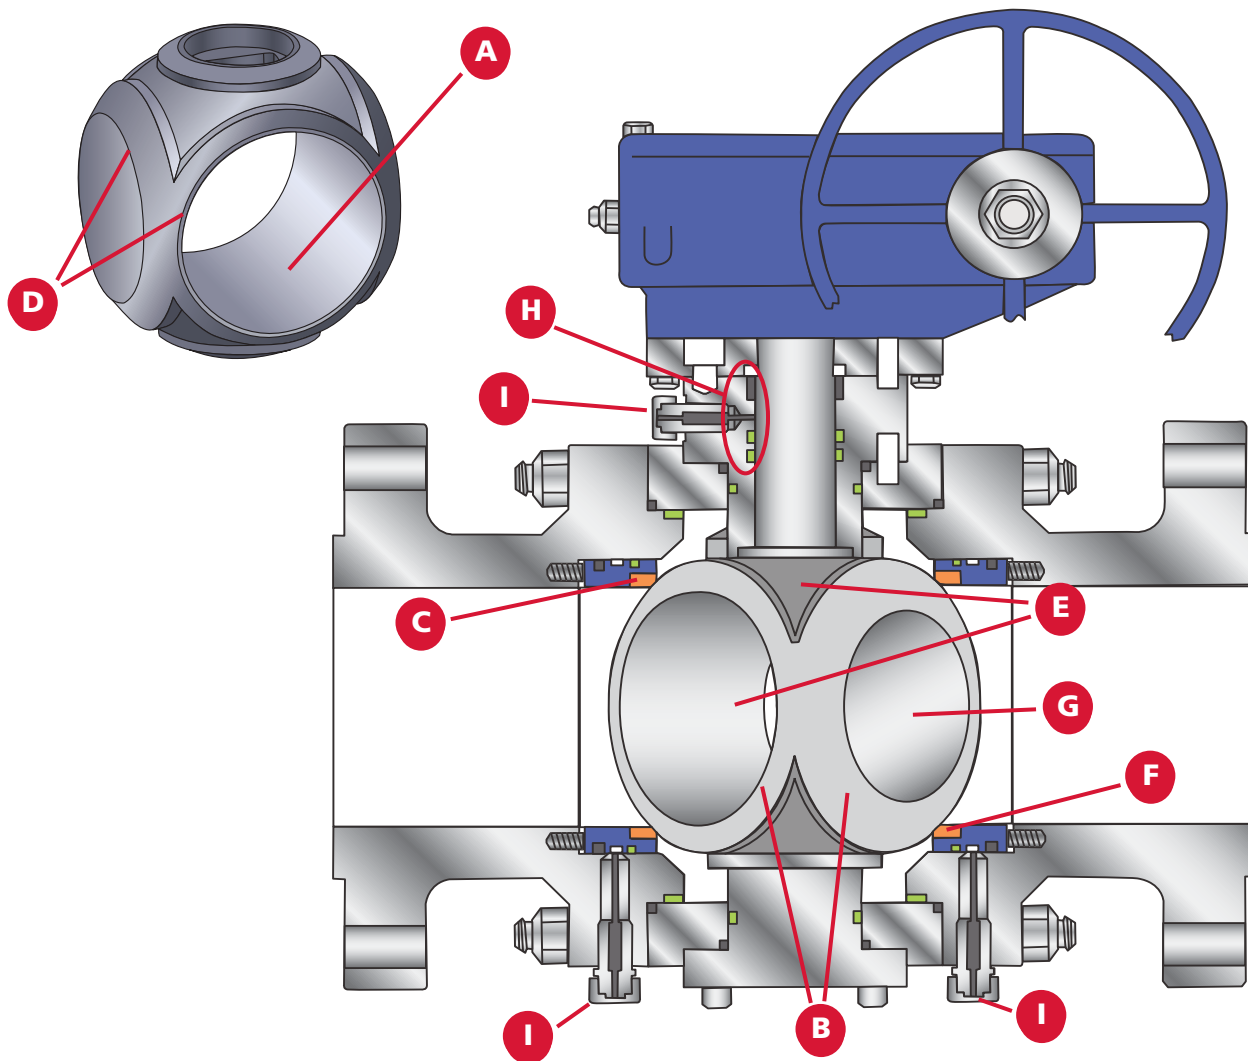

Exclusive QuadroSphere® Advantages

A. QuadroSphere® Ball

Unique contoured ball adds 4 additional flow paths: over, under and around the sides for self-flushing the ball cavity.

B. Wear Resistance

Reduced ball to seat contact creating up to 70% less wear.

C. Low Torque

Minimal ball to seat contact when opening or closing lowers the running torque.

D. Self-Cleaning Seats

Four recessed surfaces on the ball provide lipped edges for scraping the seats clean to avoid the buildup of solids and scale.

E. Multiple Flow Paths

Reduces cavitation and minimizes velocity spikes, reducing wear and erosion.

F. Protected Seating

Seat surfaces are out of the flow path and fully protected from direct flow.

G. Hardened Ball

Ground and polished hard chrome plated stainless steel ball provides low operating friction and abrasion resistance.

H. Stem Seals

Double O-ring stem seals are backed up by graphite packing compression rings as standard.

I. Injection Fittings

In the event of damage to the seat insert or stem seals, sealant can be injected to temporarily seal the valve until repairs can be made.

QuadroSphere® Ball

The QuadroSphere® Ball is not a typical ball design. Surfaces of the ball that are non-essential to sealing have been recessed in all 4 quadrants. The surfaces of the ball that have been recessed create additional flow paths allowing the flow and particulates to move freely above, below and around the sides of the ball when moving from closed to open position. Seat ring contact to the ball has minimal contact area, which reduces wear and operating torques, due to less friction. The recessed surfaces on the ball also provide lipped edges that wipe the seat surfaces clean during opening and closing to avoid particulate buildup. The ball has two sets of seating surfaces to provide shut off in the fully closed position and protect the seats in the fully open position.

Self-Cleaning Features

Typical ball valves allow liquids and solids to be trapped within the body/ball cavity, resulting in solids accumulating around the ball that can cause clogging and/or damage to the seating surfaces. When the QuadroSphere® Ball cycles, its unique 4 recessed surfaces allow solids to be flushed from the body/ball cavity to prevent buildup of the solids around the back of the seat rings and bearings, Figure 1.

Protected Seating Surfaces

The QuadroSphere® Ball protects its seats from media velocity by minimizing contact of the upstream seating surfaces during cycles. When the QuadroSphere® Ball closes, the media applies pressure to the upstream seat ring pushing it against the ball's upstream sealing surface for leak tight performance.

Lower Torque Requirements

The special machining of the ball substantially reduces the ball to seat surface contact. This creates less resistance during cycles, lowering the torque to operate the QuadroSphere® Ball Valve.


70% Less Wear

Unlike typical ball valves the QuadroSphere® Ball maintains a fraction of the resistance across the seating surfaces when cycling, reducing wear up to 70% and improving the performance life of the ball and seats. As the ball cycles, 4 additional flow paths (over, under and around both sides) are created by the recessed surfaces, eliminating localized, high velocity impingement upon the downstream seat as with typical ball valves.

Industry Compliance

The QuadroSphere® Ball Valve has undergone tests to demonstrate its unique abrasion resistant ball design in severe applications. With over 15 years of proven performance, the QuadroSphere® Ball Valve solves the most difficult application problems in many industries. The QuadroSphere® Ball Valve is designed in accordance with API 6D and ASME B16.34 requirements. The valve carries the API 6D Monogram and has been certified to API 607, Fire Test standard. The QuadroSphere® meets standards: API, ASME/ANSI, BS, ISO, MSS and NACE.

QuadroSphere® allows debris to be flushed from the valve body.

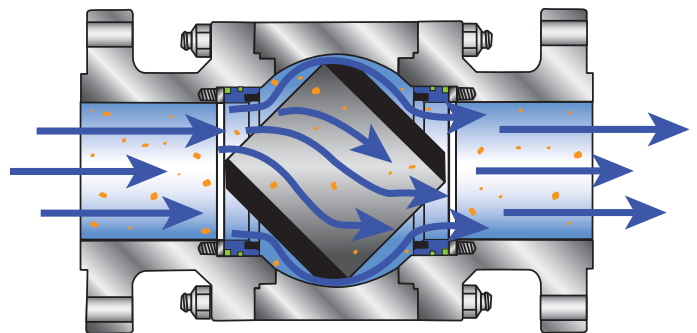

Typical Ball Valve allows debris and solids to accumulate.


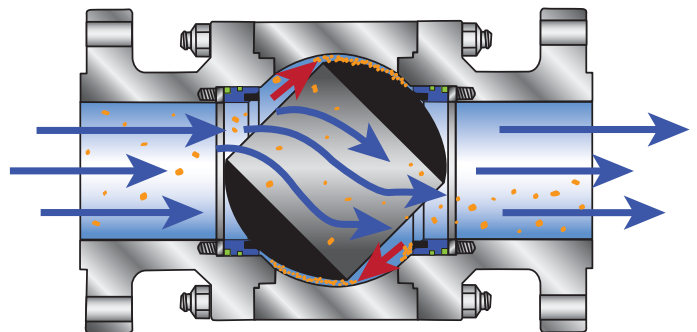


Figure 1. Flow Pattern Comparison

Construction

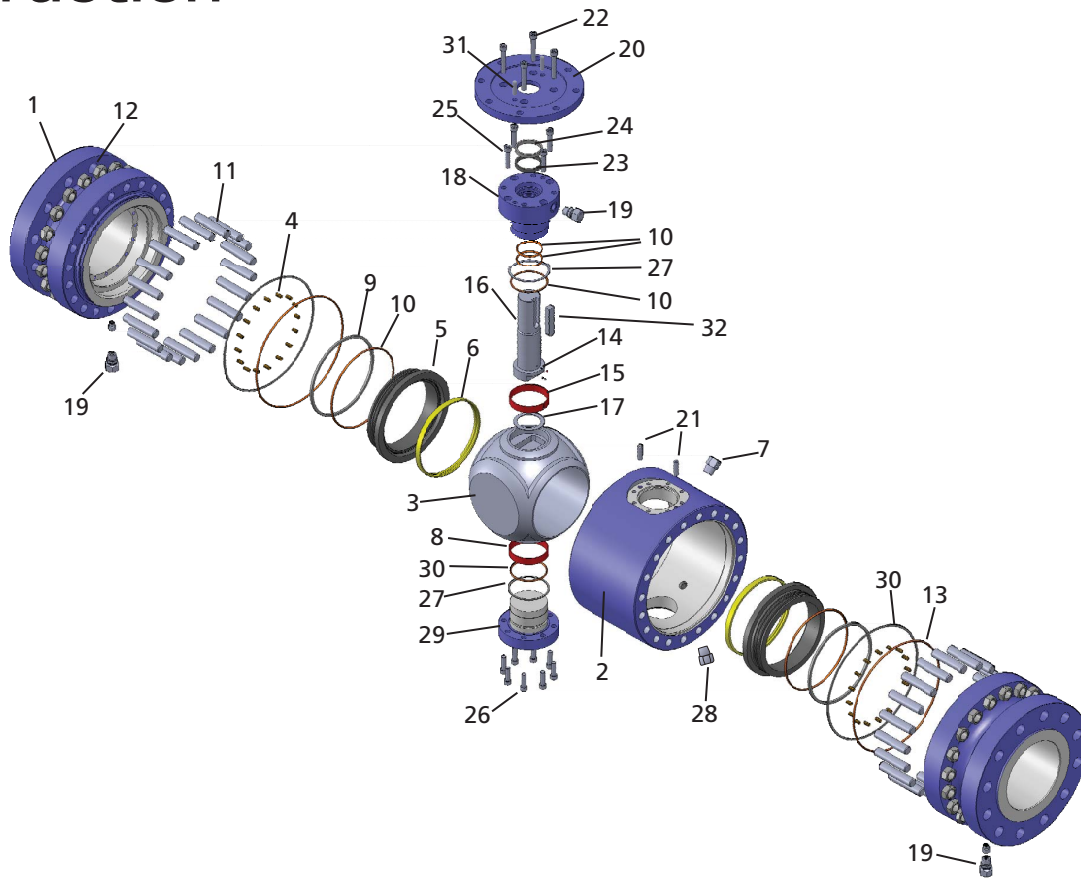

| Assy No. | Component | Standard QuadroSphere® Carbon Steel | Standard QuadroSphere® Stainless Steel | Assy No. | Component | Standard QuadroSphere® Carbon Steel | Standard QuadroSphere® Stainless Steel |
|----------|---------------------|---|---|----------|--------------------------|-------------------------------------|--|
| 1 | Body Flange | ASTM A105 CS | ASTM A182 Type 316SS | 17 | Stem Bearing | RPTFE | RPTFE |
| 2 | Body | ASTM A105 CS | ASTM A182 Type 316SS | 18 | Stem Cover | ASTM A105 CS | ASTM A182 Type 316SS |
| 3 | QS Ball | ASTM A182 Type 316SS Hard Chrome Plating | ASTM A182 Type 316SS Hard Chrome Plating | 19 | Injection Fitting | ASTM A105 CS | ASTM A276 Type 316SS |
| 4 | Spring | Inconel X-750 | Inconel X-750 | 20 | Adaptor/Packing Retainer | ASTM A105 CS | ASTM A182 Type 316SS |
| 5 | Seat Ring | ASTM A276 Type 316SS | ASTM A182 Type 316SS | 21 | Pin | Carbon Steel | ASTM A276 Type 316SS |
| 6 | Seat Insert | RPTFE (150-300) PEEK (600-2500) | RPTFE (150-300) PEEK (600-2500) | 22 | Screw | ASTM A193-B7M | ASTM A193-B8M |
| 7 | Vent Valve | ASTM A182 Type 316SS | ASTM A276 Type 316SS | 23 | Packing | Flex Graphite | Flex Graphite |
| 8 | Bearing | 1045 + PTFE | 1045 + PTFE | 24 | Gland | ASTM A182 Type 316SS | ASTM A182 Type 316SS |
| 9 | Seat Gasket | Graphite | Graphite | 25 | Screw | ASTM A193-B7M | ASTM A193-B8M |
| 10 | Seat & Stem O-rings | Viton® | Viton® | 26 | Screw | ASTM A193-B7M | ASTM A193-B8M |
| 11 | Body Stud | ASTM A193-B7M | ASTM A193-B8M | 27 | Gasket | 316 + Graphite | 316 + Graphite |
| 12 | Body Nut | ASTM A194-2HM | ASTM A194-8M | 28 | Drain Plug | ASTM A182 Type 304SS | ASTM A276 Type 316SS |
| 13 | Body Gasket | 316SS + Graphite | 316SS + Graphite | 29 | Trunnion | ASTM A105 CS | ASTM A182 Type 316SS |
| 14 | Antistatic | ASTM A276 Type 316SS | ASTM A276 Type 316SS | 30 | O-ring | Viton® | Viton® |
| 15 | Bearing | 1045 + PTFE | 1045 + PTFE | 31 | Pin | Carbon Steel | ASTM A276 Type 316SS |
| 16 | Stem | ASTM A182 Type 316SS | ASTM A276 Type 316SS | 32 | Key Pin | 1045 Carbon Steel | ASTM A479 Type 304SS / 420SS |

*Typical construction for 6-12 NPS. Contact factory for additional sizes.

Seat Insert Pressure & Temperature Limits

Overview

Figure 2 details the seat and seal design features used in QuadroSphere® Ball Valves.

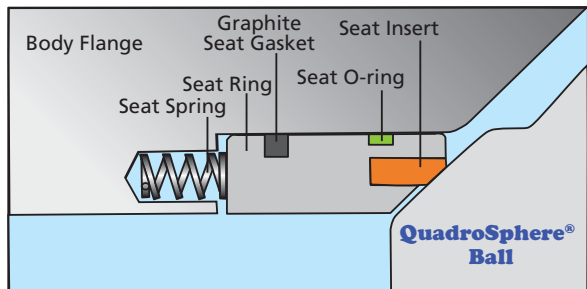


Figure 2


Component Designation Legend

Seat Insert Material: RPTFE, PTFE, PEEK, Nylon and Devlon®

O-Ring Material: Aflas®, Buna, Chemraz®, Markez®, Viton® & Viton® AED

Industry Compliance

| | |
|------------------------|--------------------|
| Basic Design | ASME B16.34/API 6D |
| Face-to-Face Dimension | API 6D |
| Flanged End Dimension | ASME B16.5 |
| Inspected & Tested to | API 6D |
| Firesafe Certification | API 607 |
| Quality Certification | ISO 9001 |

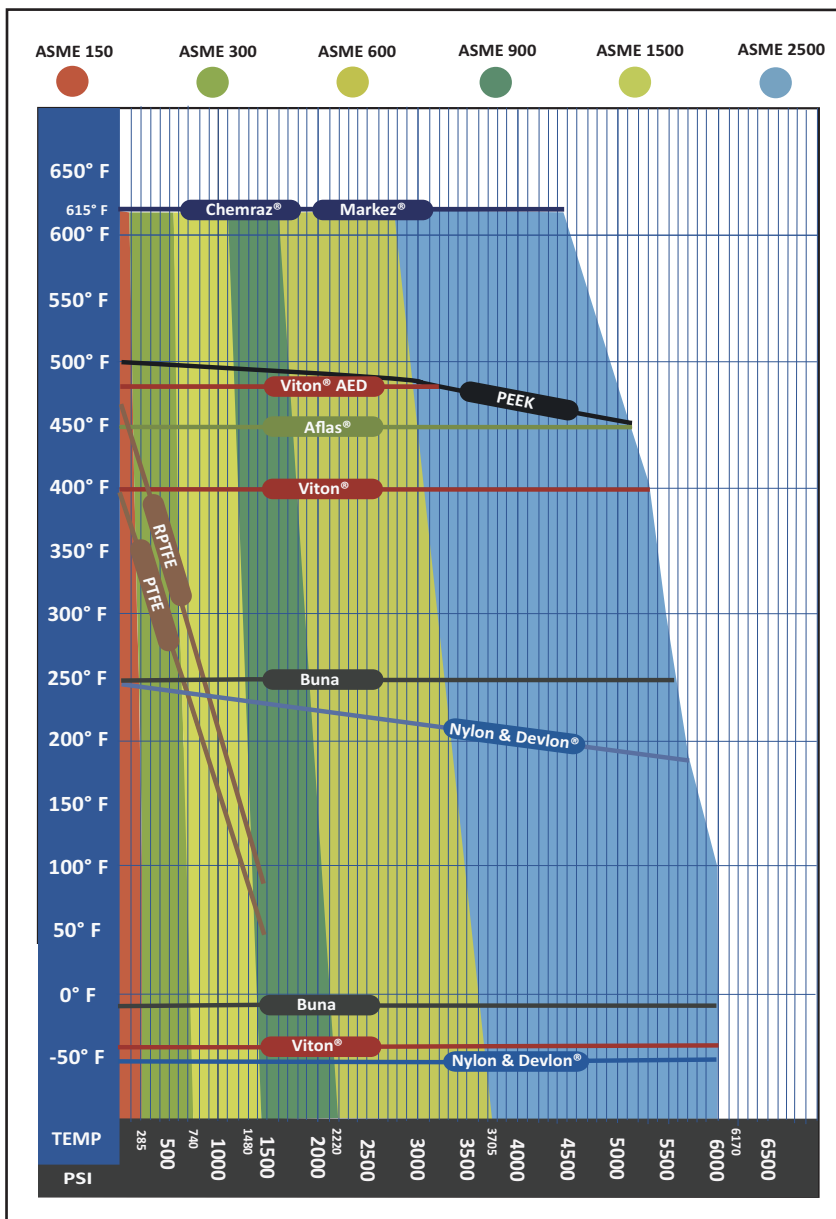

Industries

| Industry | Examples |
|---------------------|---|
| Oil & Gas Pipelines | Tank Farms, Meter Stations, Pumps Isolation, Offshore Platforms, Fracking Water Treatment Systems, Heat Exchanger Water, Compressor Stations, Pig Launchers & Receivers |
| Marine | Loading & Off-Loading, Barge & Ship Fluid Transfer |
| Refining | Drum Feed, Drum Blow Down, Vapor Lines, Quench Water, Bypass, Drain, Low Pressure Steam, Hot Oil, Isolation |
| Geothermal | Salt Dome Brine & Gas, Salt Dome Wells & Storage, Concentrated Brine & Natural Gas, Well Christmas Tree Master & Crown Valve, Vent Lines |
| Power | Fly Ash Water/Slurry, River Water, Pump Isolation, Crude Oil, Low Steam Pressure |
| Chemical | PVC Reactors Outlet/Diverter Service, PVC Waste Pump Isolation, PVC Slurry, Lock Hopper Isolation, Chlorine Transfer, Reactor Feed & Isolation |
| Pulp & Paper | White, Green and Black Liquor |
| Cryogenic | LNG Vaporization, Swing Absorption Switching |
| Mining/Steel | Tailings, Dirty Mine Water, Gases & Liquids |

Design Features

Ball Valve Piston Effect

Single Piston Effect Seating (API 6D DBB)

In the standard configuration, the ball valve seats are floating and are activated by springs and line pressure to seal tightly against the QuadroSphere® Ball. The seats have an O-ring seal on the outside diameter and a resilient seat insert at the center creating a piston effect area. Upstream and downstream line pressure act over this piston area to force the seals with the required thrust to seal tightly against the ball, Figure 3. If pressure in the valve cavity exceeds the upstream or downstream pressure, the piston effect will work in the opposite direction and automatically relieves any overpressure, Figure 4. Additionally, the valve body is equipped with vent and drain connections to verify seat integrity with the valve in service. The single piston effect is defined in API 6D as Double-Block-and-Bleed (DBB) design. Since the cavity is automatically relieved, any leakage through the first seat will also be relieved by the second seat so DBB valves do not provide positive double isolation.

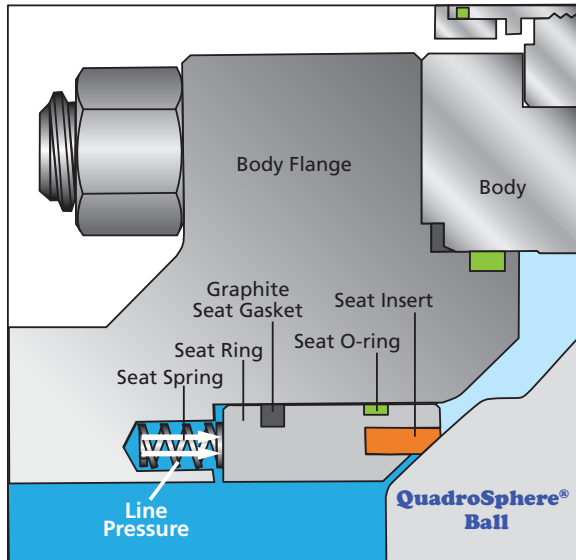


Figure 3

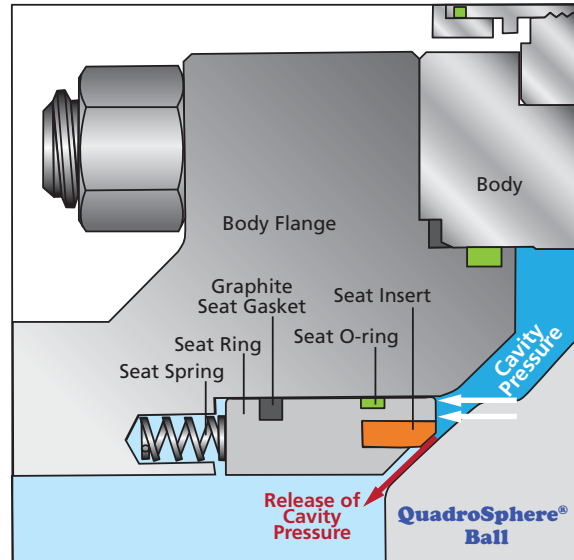


Figure 4

Double Piston Effect Seating (API 6D DIB)

In the optional configuration, the ball valve seats have an enlarged O-ring groove that allows the O-ring to be activated bi-directionally by either the line pressure or the cavity pressure. As with the single piston design, the line pressure acts over the piston area to force the seals with the required thrust to seal tightly against the QuadroSphere® Ball, Figure 5. In addition, the cavity pressure is connected to the O-ring seal and will also force the ball valve seat against the ball, Figure 6. Therefore, both valve seats will seal with line pressure from the same direction when needed, providing true double isolation. To avoid overpressure in the ball valve cavity due to thermal expansion, an automatic cavity pressure relief device is provided. The double piston effect is defined in API 6D as Double-Isolation-and-Bleed (DIB) and can be provided in one or both directions. Since both the upstream and downstream seats are activated by line and cavity pressure, DIB valves provide reliable double isolation.

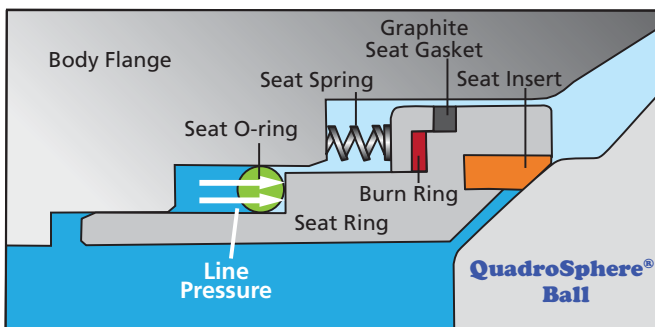


Figure 5

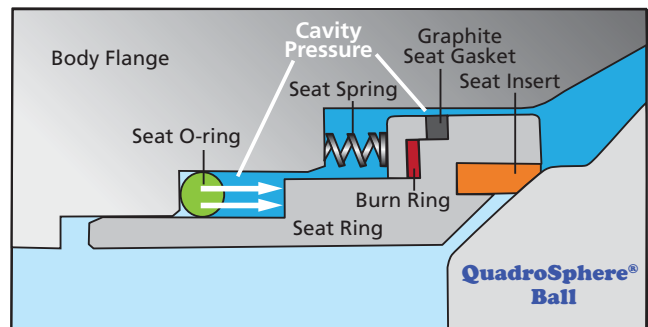


Figure 6

Soft Seated Valves

QuadroSphere® Ball Valves are equipped with two independent floating seat rings, Figure 8. These seat rings have resilient seat inserts installed into the seat ring to provide primary soft seating in addition to the secondary metal to metal seating between the ball and the seat ring. The sealing between the seat ring and the valve body flange is achieved by means of the seat O-ring and graphite seat gasket, Figure 7.

Bi-Directional Seating

The standard QuadroSphere® Ball Valve has bi-directional seating, which means the valve will seal with the line pressure coming from the upstream side of the valve or from the downstream side of the valve. Also the valve can be installed in the pipeline without having to ensure proper seating orientation of the valve, unlike some other ball valves.

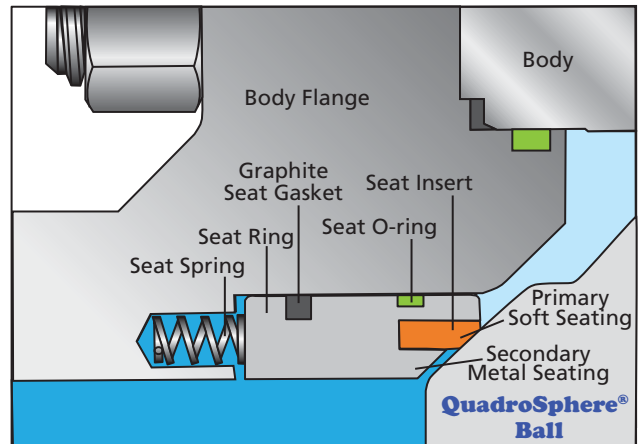


Figure 7

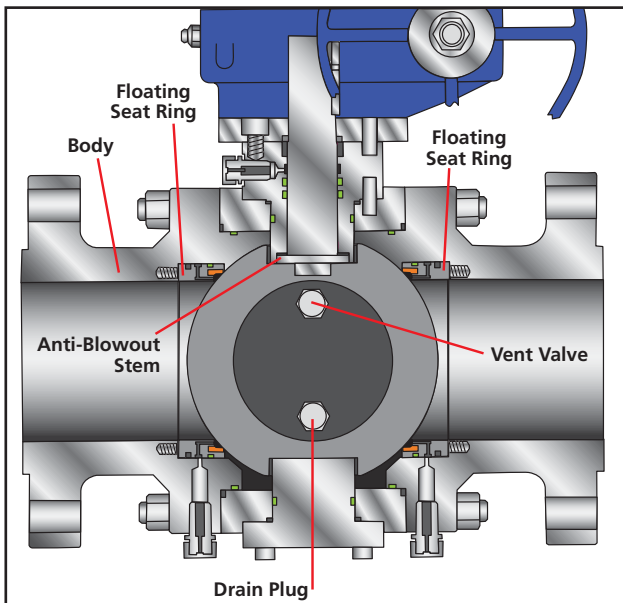


Figure 8

Emergency Sealant Injection

The design of QuadroSphere® Ball Valves does not require the use of a sealant injection for standard operation. An emergency sealant injection system for stem seals and seat rings is a standard feature on all 6 NPS and larger QuadroSphere® Ball Valves with the single piston design. In the event of damage to the seat insert or stem seals, sealant can be injected to temporarily seal the valve until repairs can be made, Figure 9.

(For certain chemical applications, the sealant injection fittings may not be suitable. Consult factory with application for compatibility.)

Anti-Blowout Stem

The stem has an integral collar to prevent the stem from being ejected from the valve, while under line pressure per API 6D and ASME B16.34 standards, Figure 8.

Stem Seals & Bearings

The area around the stem seals and bearings is flushed clean each time the valve cycles from open to close. This helps to eliminate solids build up, that can damage the seals and bearings during operation, Figure 1, page 3.

Body & Ball Construction

The QuadroSphere® body and ball are forgings to provide superior surface finish and structural integrity. Forgings prevent defects, normally associated with castings such as pitting, sand inclusions, porosity and any need for weld repairs.

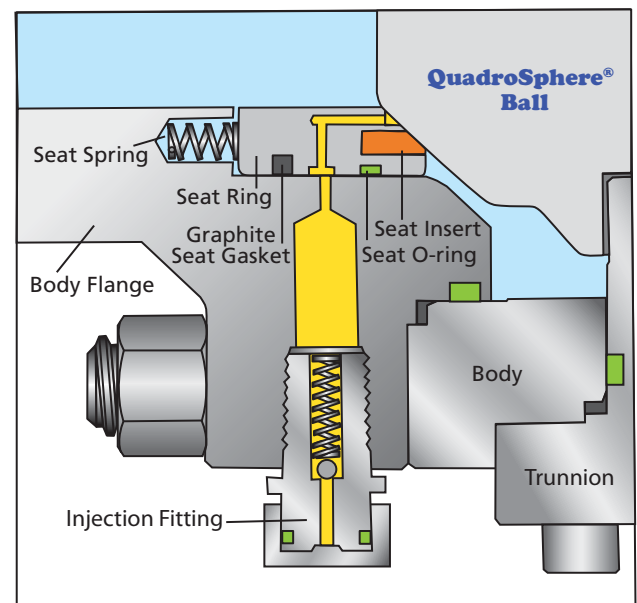


Figure 9

Design Features

Fire-Safe - Single Piston

The Fire-Safe QuadroSphere® Ball Valve is designed, tested and certified to API 607. Figure 10 shows the single piston standard seat design. During a fire the seat insert and O-ring are destroyed and the seat gasket, made of graphite material, will remain to seal off the media along with the secondary metal seat on the seat ring, Figure 11.

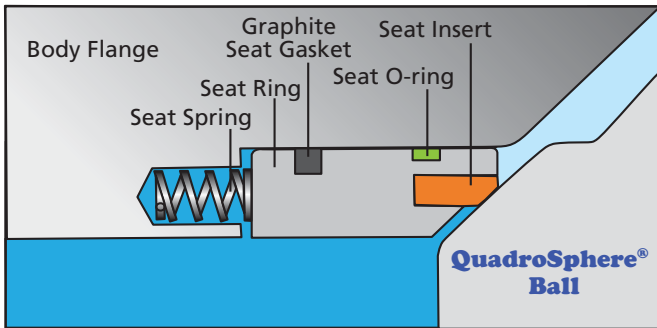


Figure 10

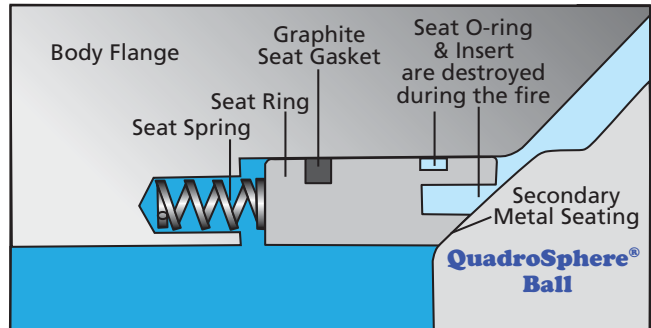


Figure 11

Fire-Safe - Double Piston

Figure 12 shows the seat configuration before the fire, where there is a gap between the gasket and the body. Figure 13 shows the seat configuration after a fire, where the burn ring has melted away and permits the seat graphite pusher to compress the gasket against the body to create a seal. The Double Piston Fire-Safe design does not permit the use of the emergency sealant injection.

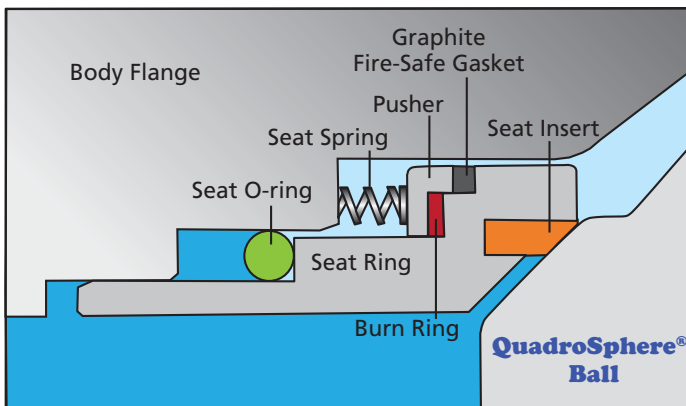


Figure 12

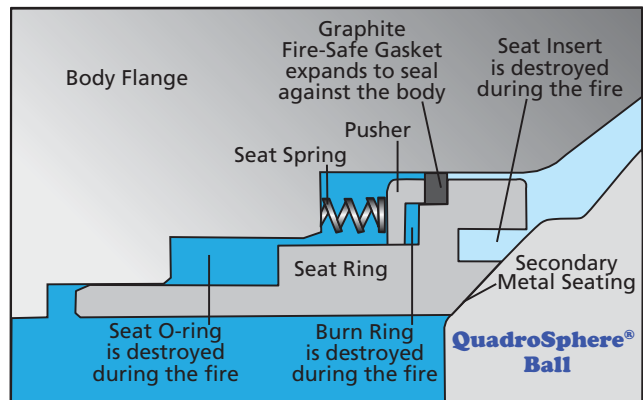


Figure 13

Optional Materials

| Component | Material |
|--------------|--|
| Body | LF2, LCB, Duplex, Other Materials on Application |
| Seat Insert | RPTFE, PEEK, Nylon, Devlon®, Delrin® |
| Seat Ring | 17-4 PH condition H 1150 |
| Seal | Aflas®, Buna, Chemraz®, Markez®, Viton® AED |
| Shaft | 17-4 condition H 1150, Duplex Stainless Steel |
| Ball Surface | Stellite, Electroless Nickel |

Flow Coefficients, (Cv)

| Size (NPS) | ASME 150 | ASME 300 | ASME 600 | ASME 900 | ASME 1500 | ASME 2500 | Size (DN) |
|------------|----------|----------|----------|----------|-----------|-----------|-----------|
| 2 | 450 | 430 | 370 | 330 | 320 | 300 | 50 |
| 3 | 1360 | 1100 | 1020 | 920 | 830 | 520 | 80 |
| 4 | 2000 | 2000 | 1850 | 1760 | 1660 | 1200 | 100 |
| 6 | 5500 | 5500 | 4400 | 4300 | 4167 | 2900 | 150 |
| 8 | 10000 | 10000 | 8450 | 8400 | 8013 | See Note | 200 |
| 10 | 17000 | 17000 | 14250 | 14160 | 13309 | | 250 |
| 12 | 24000 | 24000 | 24000 | 21320 | 17073 | | 300 |
| 14 | 32600 | 28000 | 28000 | 26600 | 24500 | | 350 |
| 16 | 44700 | 36000 | 36000 | 36000 | 33215 | | 400 |
| 18 | 57825 | 56225 | 57410 | See Note | See Note | | 450 |
| 20 | 74775 | 71800 | 65463 | | | 500 | |
| 24 | 113284 | 109414 | 98963 | | | 600 | |

Note: Consult Factory for Availability.

Product Scope

QuadroSphere® - Product Scope

| Series | ASME Rating | Size Range NPS (DN) | CWP* (psig) | End Connections |
|--------|-------------|---------------------|-------------|---|
| 4700A1 | 150 | 2 - 24 (50-600) | 285 | Standard: Flanged Optional: Butt Weld RTJ |
| 4700A3 | 300 | 2 - 24 (50-600) | 740 | |
| 4700A6 | 600 | 2 - 24 (50-600) | 1480 | |
| 4700A9 | 900 | 2 - 16 (50-400) | 2220 | |
| 4700AA | 1500 | 2 - 16 (50-400) | 3705 | |
| 4700AB | 2500 | 2 - 6 (50-150) | 6170 | |

*Based on Carbon Steel

**Consult factory for additional sizes and pressure class availability.

Product Options:

Extended Bonnet, Double Piston Effect Seats w/ relief, Special Coatings, NACE,
Low pressure seat tests can be performed per customer requirements


ASME Ratings

Pressure/Temperature Ratings (PSIG)

| Material | | Class 150 | Class 300 | Class 600 | Class 900 | Class 1500 | Class 2500 |
|------------|-------|-----------|-----------|-----------|-----------|------------|------------|
| A105 & LF2 | 100°F | 285 | 740 | 1480 | 2220 | 3705 | 6170 |
| | 200°F | 260 | 680 | 1360 | 2035 | 3395 | 5655 |
| | 300°F | 230 | 655 | 1310 | 1965 | 3270 | 5450 |
| | 400°F | 200 | 635 | 1265 | 1900 | 3170 | 5280 |
| | 500°F | 170 | 605 | 1205 | 1810 | 3015 | 5025 |
| | 600°F | 140 | 570 | 1135 | 1705 | 2840 | 4730 |
| | 700°F | 110 | 530 | 1060 | 1590 | 2665 | 4425 |
| | 800°F | 80 | 410 | 825 | 1235 | 2055 | 3430 |
| F316 | 100°F | 275 | 720 | 1440 | 2160 | 3600 | 6000 |
| | 200°F | 235 | 620 | 1240 | 1860 | 3095 | 5160 |
| | 300°F | 215 | 560 | 1120 | 1680 | 2795 | 4660 |
| | 400°F | 195 | 515 | 1025 | 1540 | 2570 | 4280 |
| | 500°F | 170 | 480 | 955 | 1435 | 2390 | 3980 |
| | 600°F | 140 | 450 | 900 | 1355 | 2255 | 3760 |
| | 700°F | 110 | 435 | 870 | 1305 | 2170 | 3620 |
| | 800°F | 80 | 420 | 845 | 1265 | 2110 | 3520 |

Dimensions

Trunnion Design • 2 thru 24 NPS ASME Class 150

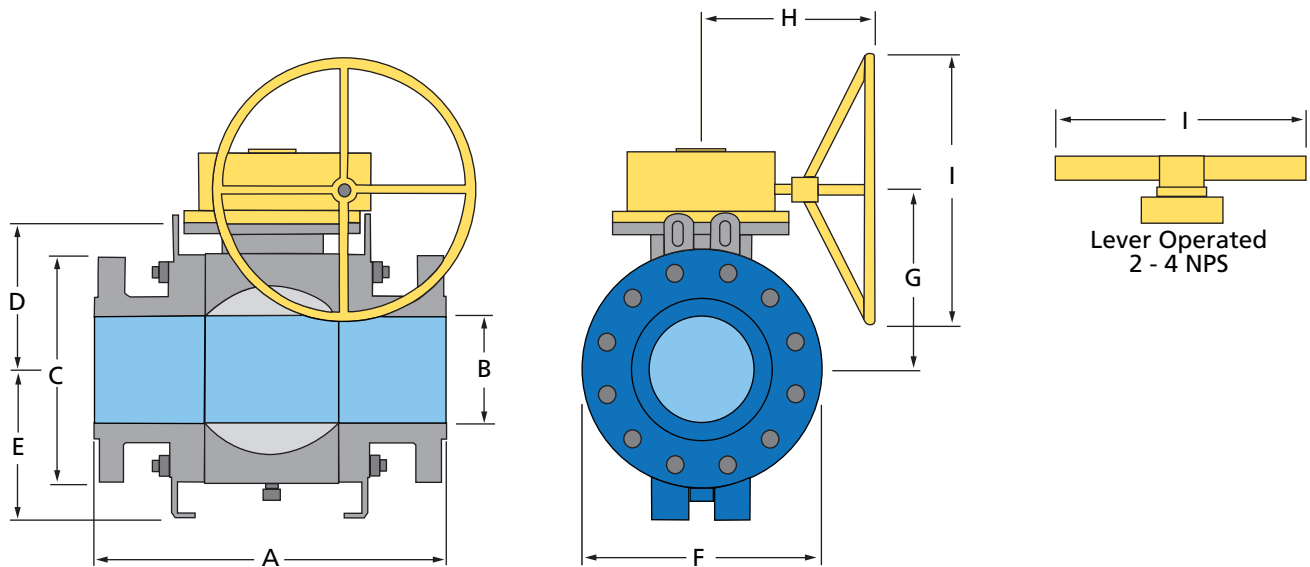


| Class 150 - Dimensions in Inches (mm) | | | | | | | | | | |
|---------------------------------------|-----------------|----------------|------------------|------------------|------------------|-----------------|----------------|------------------|----------------|----------------------|
| Size NPS (DN) | A | B | C | D | E | F | G | H | I | Weight LB (KG) |
| 2 (50) | 7.00 (178) | 1.93 (49) | 6.00 (152.4) | 3.88 (98.43) | - | 6.02 (153) | 6.40 (163) | - | 11.80 (300) | 56 (25) |
| 3 (80) | 8.00 (203) | 2.91 (74) | 7.50 (191) | 5.38 (136.3) | - | 7.52 (191) | 6.40 (163) | - | 18.10 (460) | 76 (35) |
| 4 (100) | 9.00 (229) | 3.94 (100) | 9.00 (228.6) | 6.19 (157.2) | - | 9.13 (232) | 7.10 (180) | - | 18.10 (460) | 115 (52) |
| 6 (150) | 15.50 (394) | 5.91 (150) | 11.00 (279.4) | 7.00 (177.8) | 7.36 (187) | 12.09 (307) | 10.90 (277) | 11.94 (303.2) | 15.70 (400) | 415 (189) |
| 8 (200) | 18.00 (457) | 7.91 (201) | 13.50 (342.9) | 8.75 (222.3) | 8.82 (224) | 15.43 (392) | 14.10 (358) | 11.94 (303.2) | 15.70 (400) | 752 (342) |
| 10 (250) | 21.00 (533) | 9.92 (252) | 16.00 (406.4) | 11.25 (285.8) | 10.94 (278) | 18.31 (465) | 16.20 (412) | 14.63 (371.5) | 19.70 (600) | 1020 (464) |
| 12 (300) | 24.00 (610) | 11.93 (303) | 19.00 (482.6) | 12.63 (320.7) | 12.05 (306) | 21.38 (543) | 18.20 (462) | 14.63 (371.5) | 23.60 (600) | 1555 (707) |
| 14 (350) | 27.00 (686) | 13.15 (334) | 21.00 (533.4) | 15.70 (400) | 15.30 (388) | 25.10 (638) | 18.50 (470) | 20.40 (518) | 23.60 (600) | 1600 (727) |
| 16 (400) | 30.00 (762) | 15.16 (385) | 23.50 (596.9) | 16.70 (423) | 17.70 (450) | 28.00 (710) | 19.40 (493) | 18.70 (475) | 27.60 (700) | 2244 (1020) |
| 18 (450) | 34.00 (864) | 17.17 (436) | 25.00 (635) | 19.10 (485) | 19.50 (495) | 31.90 (810) | 22.30 (566) | 22.60 (575) | 27.60 (700) | 2673 (1215) |
| 20 (500) | 36.00 (914) | 19.17 (487) | 27.50 (698.5) | 21.10 (537) | 21.40 (543) | 34.10 (865) | 24.30 (618) | 22.60 (575) | 27.60 (700) | 3945 (1793) |
| 24 (600) | 42.00 (1067) | 21.18 (539) | 32.00 (813) | 24.30 (616) | 23.20 (590.5) | 40.40 (1025) | 27.80 (705) | 23.30 (592) | 31.50 (800) | 6818 (3099) |

- Notes:
1. Dimensions Ball Diameter (B) are per API 6D design convention.
 2. Additional materials and design configurations available. Please contact factory.

Dimensions

Trunnion Design • 2 thru 24 NPS • ASME Class 300

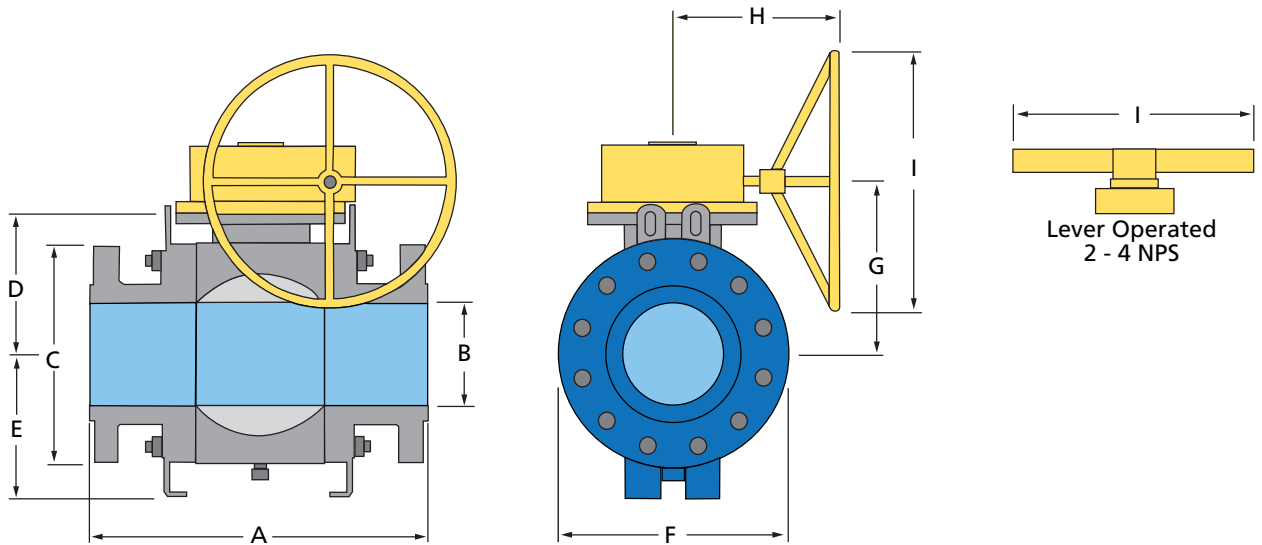


| Class 300 - Dimensions in Inches (mm) | | | | | | | | | | |
|---------------------------------------|-----------------|----------------|------------------|------------------|----------------|------------------|------------------|------------------|----------------|----------------------|
| Size NPS (DN) | A | B | C | D | E | F | G | H | I | Weight LB (KG) |
| 2 (50) | 8.50 (216) | 1.93 (49) | 6.50 (165.1) | 3.88 (98.4) | - | 3.90 (100) | 6.40 (162.56) | - | 11.80 (300) | 65 (30) |
| 3 (80) | 11.13 (283) | 2.91 (74) | 8.25 (209.6) | 5.38 (136.3) | - | 8.30 (210) | 6.40 (162.56) | - | 18.10 (460) | 122 (55) |
| 4 (100) | 12.00 (305) | 3.94 (100) | 10.00 (254) | 6.19 (157.2) | - | 10.00 (254) | 7.10 (180.34) | - | 18.10 (460) | 202 (92) |
| 6 (150) | 15.88 (403) | 5.91 (150) | 12.50 (317.5) | 7.00 (177.8) | 7.90 (200) | 12.50 (317.5) | 10.90 (277) | 11.94 (303.2) | 15.70 (400) | 447 (203) |
| 8 (200) | 19.75 (502) | 7.91 (201) | 15.00 (381) | 8.75 (222.3) | 9.10 (230) | 15.20 (385) | 14.10 (358) | 11.94 (303.2) | 15.70 (400) | 785 (357) |
| 10 (250) | 22.38 (568) | 9.92 (252) | 17.50 (444.5) | 11.25 (285.8) | 11.60 (295) | 18.50 (470) | 16.20 (412) | 14.63 (371.5) | 23.60 (600) | 1115 (507) |
| 12 (300) | 25.50 (648) | 11.93 (303) | 20.50 (520.7) | 12.63 (320.7) | 13.00 (330) | 21.30 (540) | 18.20 (462) | 14.63 (371.5) | 27.60 (700) | 1622 (737) |
| 14 (350) | 30.00 (762) | 13.15 (334) | 23.00 (584.2) | 15.70 (400) | 15.30 (388) | 25.10 (638) | 18.50 (470) | 20.40 (518) | 23.60 (600) | 1890 (859) |
| 16 (400) | 33.00 (838) | 15.16 (385) | 25.50 (647.7) | 16.70 (423) | 16.70 (423) | 28.00 (710) | 19.40 (493) | 22.60 (575) | 27.60 (700) | 2650 (1205) |
| 18 (450) | 36.00 (914) | 17.17 (436) | 28.00 (711) | 19.20 (488) | 19.60 (498) | 32.30 (820) | 22.40 (569) | 22.60 (575) | 27.60 (700) | 3502 (1592) |
| 20 (500) | 39.00 (991) | 19.17 (487) | 30.50 (774.7) | 21.20 (538) | 21.60 (549) | 34.40 (874) | 24.70 (627) | 23.30 (592) | 31.50 (800) | 4829 (2195) |
| 24 (600) | 45.00 (1143) | 21.18 (539) | 36.00 (914) | 24.60 (624) | 23.40 (594) | 40.90 (1040) | 29.30 (744) | 27.30 (693) | 35.40 (900) | 7612 (3460) |

- Notes:
1. Dimensions Ball Diameter (B) are per API 6D design convention.
 2. Additional materials and design configurations available. Please contact factory.

Dimensions

Trunnion Design • 2 thru 24 NPS • ASME Class 600

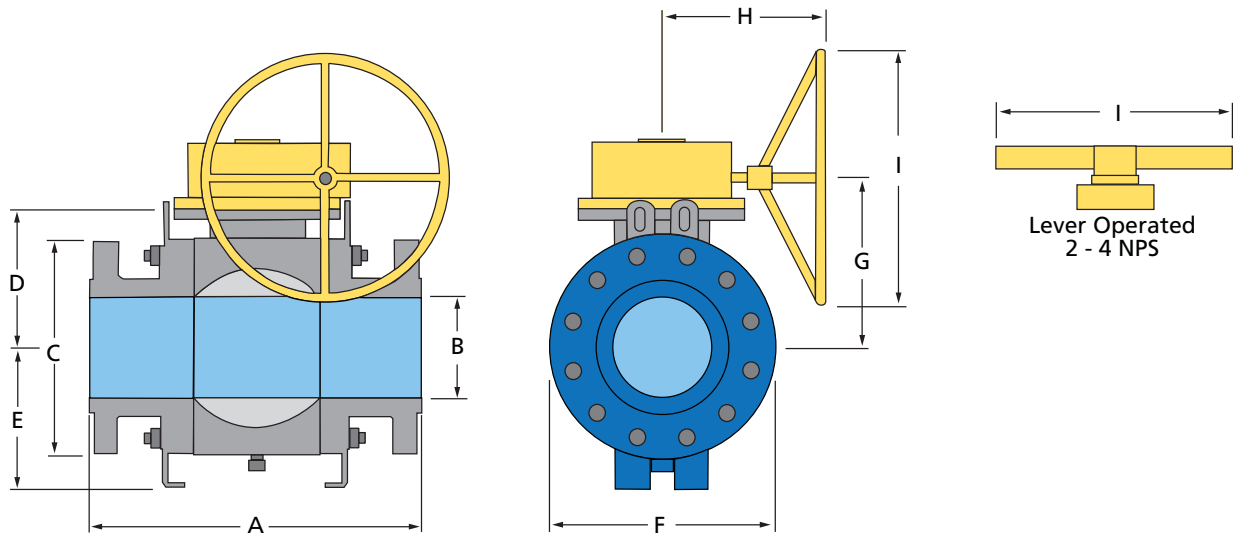


Class 600 - Dimensions in Inches (mm)

| Size NPS (DN) | A | B | C | D | E | F | G | H | I | Weight LB (KG) |
|---------------------|-----------------|----------------|-------------------|------------------|------------------|-----------------|------------------|------------------|-----------------|----------------------|
| 2 (50) | 11.50 (292) | 1.93 (49) | 6.50 (165.1) | 6.10 (155) | - | 6.50 (165) | 6.40 (162.56) | - | 23.60 (600) | 99 (45) |
| 3 (80) | 14.00 (356) | 2.91 (74) | 8.25 (209.55) | 6.70 (170) | - | 9.00 (229) | 6.40 (162.56) | - | 27.55 (700) | 176 (80) |
| 4 (100) | 17.00 (432) | 3.94 (100) | 10.75 (273.05) | 8.00 (201) | - | 10.40 (264) | 7.10 (180.34) | - | 33.70 (857) | 308 (140) |
| 6 (150) | 22.00 (559) | 5.91 (150) | 14.00 (356) | 9.10 (230) | 9.20 (234.5) | 12.60 (319) | 11.50 (292) | 11.94 (303.2) | 15.70 (400) | 557 (253) |
| 8 (200) | 26.00 (660) | 7.91 (201) | 16.50 (419.1) | 11.40 (290.5) | 12.40 (316) | 17.00 (432) | 14.30 (363) | 11.94 (303.2) | 19.70 (500) | 1067 (485) |
| 10 (250) | 31.00 (787) | 9.92 (252) | 20.00 (508) | 13.00 (329) | 15.70 (399) | 20.40 (518) | 16.50 (418.5) | 14.63 (371.5) | 23.6 (600) | 1668 (758) |
| 12 (300) | 33.00 (838) | 11.93 (303) | 22.00 (558.8) | 15.90 (404.7) | 17.80 (451) | 24.50 (622) | 18.20 (463) | 14.63 (371.5) | 27.6 (609.6) | 2347 (1067) |
| 14 (350) | 35.00 (889) | 13.15 (334) | 23.75 (603.25) | 15.70 (400) | 15.30 (388.5) | 25.10 (638) | 18.50 (470) | 20.40 (518) | 23.60 (600) | 2383 (1083) |
| 16 (400) | 39.00 (991) | 15.16 (385) | 27.00 (686) | 17.40 (443) | 17.60 (445.8) | 28.90 (735) | 19.40 (493) | 22.60 (575) | 27.60 (700) | 3355 (1525) |
| 18 (450) | 43.00 (1092) | 17.17 (436) | 29.30 (743) | 19.60 (498) | 20.10 (510.5) | 33.10 (840) | 22.40 (569) | 22.60 (575) | 27.60 (700) | 4609 (2095) |
| 20 (500) | 47.00 (1194) | 19.17 (487) | 32.00 (812.8) | 22.20 (565) | 21.30 (542) | 36.20 (920) | 24.70 (627) | 23.30 (592) | 31.50 (800) | 5804 (2638) |
| 24 (600) | 55.00 (1397) | 21.18 (539) | 37.00 (940) | 24.60 (624.5) | 23.50 (596) | 41.10 (1045) | 29.30 (744) | 27.30 (693) | 35.40 (900) | 10419 (4736) |

- Notes:
1. Dimensions Ball Diameter (B) are per API 6D design convention.
 2. Additional materials and design configurations available. Please contact factory.

Model Numbers

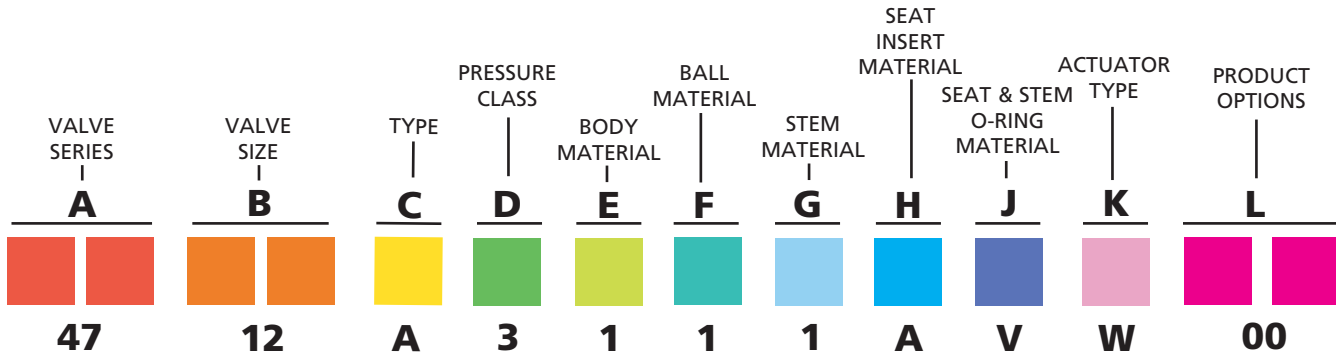

Example: 12 NPS Flanged, Trunnion, 3 Piece, Full Bore Ball Valve, Class 300, Carbon Steel A105 body, T316 stainless steel ball/HC, T316 Stainless Steel Stem, RPTFE Seat Insert, Viton® O-Ring, with a Worm Gear actuator.

| | | | |
|--|----------------------------|--|--|
| A | VALVE SERIES | G | STEM MATERIAL |
| 4700 - QuadroSphere® Ball Valve | | 1 - T316 SS 5 - Monel, K500 9 - LF2/ENP 2 - T410 SS 6 - Inconel, 625 3 - T420 SS 7 - F51 SS 4 - 17-4 PH 8 - A105/ENP | |
| B | SIZE | H | SEAT INSERT MATERIAL |
| Sizes shown in NPS (DN) 2 (50) 8 (200) 16 (400) 3 (80) 10 (250) 18 (450) 4 (100) 12 (300) 20 (500) 6 (150) 14 (350) 24 (600) | | A - RPTFE E - NYLON B - DEVLON® F - METAL SEAT/STELLITE C - PEEK G - METAL SEAT/TCC D - DELRIN® | |
| C | TYPE | J | SEAT & STEM O-RING MATERIAL |
| A - Flanged, Trunnion, 3 Piece, Full Bore B - Butt Weld, Trunnion, 3 Piece, Full Bore C - RTJ Flanged, Trunnion, 3 Piece, Full Bore | | V - Viton® C - Chemraz® A - Aflas® B - Buna-N M - Markez® D - Viton® AED | |
| D | ASME PRESSURE CLASS | K | ACTUATOR TYPE |
| 1 - 150 9 - 900 3 - 300 A - 1500 6 - 600 B - 2500 | | B - Bare Stem M - Motor Actuator H - Hydraulic Actuator P - Pneumatic Actuator L - Lever W - Worm Gear | |
| E | BODY MATERIAL | L | PRODUCT OPTIONS |
| 1 - Carbon Steel, A105 2 - Carbon Steel, LF2 3 - T316 Stainless Steel, F316 4 - Carbon Steel, LCB | | 00 - Standard Construction XX - Factory Designation for options, i.e.: Special Coatings Double Piston Effect Seats Special Testing | |
| F | BALL MATERIAL | | |
| 1 - T316 Stainless Steel, F316/ Hard Chrome Plated (HC) 2 - Carbon Steel, A105 / HC 3 - Carbon Steel, LF2 / HC 4 - Carbon Steel, LCB / HC 5 - Stainless Steel, F51 / HC 6 - Carbon Steel, A105 / ENP 7 - Carbon Steel, LF2 / ENP 8 - SS410/HC | | | |

SCOPE

- 1.1 This specification covers the design, manufacture, and testing of QuadroSphere® Trunnion Mounted Ball Valves furnished in sizes 2 to 24 NPS, in ASME Pressure Classes 150 thru 2500.

SPECIFIC DESIGN CONSIDERATIONS

- 2.1 Valve to incorporate QuadroSphere® high integrity ball element to promote self-flushing feature and minimize seat wear.
- 2.2 Valve ball element to be relieved on top and bottom adjacent to trunnions to minimize seat and ball element engagement and promote self-flushing feature.
- 2.3 Valve ball element to be truncated on upstream and downstream ends to minimize seat and ball element engagement.
- 2.4 Ball engagement with seat shall be less than that of standard spherical ball during interim valve travel to promote sealing integrity.
- 2.5 Geometry of ball element shall allow (5) separate and distinct flow paths to maximize efficiency of flow during interim valve travel.
- 2.6 Valve seat and ball contact shall be minimized during interim travel such that minimal contact exists between ball and seat.
- 2.7 Valve seat and ball contact shall be reduced to four (4) independent line contact points on each seat during interim valve travel.

OTHER DESIGN CONSIDERATIONS

- 3.1 Valve to be trunnion mounted design to provide bi-directional sealing and to reduce running torque.
- 3.2 Valve ball to be 316 SS with Hard Chrome applied as minimum standard.
- 3.3 Valve seats and stem to be 316 SS construction as minimum standard.
- 3.4 Valve seats shall be a spring loaded/pressure energized design. They shall have an insert with a secondary metal seat back up.
- 3.5 The stem shall be anti-blowout design with anti-static devices.
- 3.6 4 NPS valves and smaller to have drain, vent, and stem injection ports.
- 3.7 6 NPS valves and larger to have drain, vent, stem, and two seat injection ports.
- 3.8 Valve shall incorporate double block and bleed sealing design (DBB).
- 3.9 Valve shall be capable of bi-directional flow.
- 3.10 Valve shall be capable of bi-directional shut-off.
- 3.11 Valve shall exhibit zero leakage per section 11 of API 6D.
- 3.12 Valve seat assemblies shall be field replaceable.
- 3.13 Valve body and ball shall be forged material.

STANDARDS AND APPROVALS

- 4.1 Valve to be manufactured per ASME B16.34 & API 6D.
- 4.2 Valve to carry API 6D Monogram.
- 4.3 Valve face-to-face dimensions to be per API 6D.

- 4.4 Valve Flanged end dimensions to be per ASME B16.5.
- 4.5 Valve Butt Weld end dimensions to be per ASME B31.4.
- 4.6 Valve to be available in anti-static and Fire-Safe design to API 607.
- 4.7 Valve top works shall have ISO 5211 compliant mounting pad.
- 4.8 Valve bolting material shall conform to be ASME B16.34.
- 4.9 Valve shall be permanently marked in accordance with API 6D. Valve shall not be marked on the flanges.
- 4.10 Manufacturer shall have a quality management system that is certified to ISO 9001 by an accredited, certifying body.

ACTUATION

- 5.1 Manual, electric or pneumatic actuation shall be provided as specified.
- 5.2 Lever handles are available for certain valve sizes and pressure classes. Consult factory.
- 5.3 Manual actuators shall be of the worm and gear design with externally adjustable stops. Actuators shall be lubricated and fully enclosed against the entry of water.
- 5.4 Pneumatic actuators shall be provided as specified.
- 5.5 Electric actuators shall be provided as specified.
- 5.6 Other types of actuation shall be provided as specified.

OPTIONS

- 6.1 Seating surface options are available for the ball and metal seats: Stellite, Electroless Nickel
- 6.2 Seat materials include: RPTFE, PTFE, PEEK, Nylon, Devlon® and Delrin®.
- 6.3 Seal materials include: Aflas®, Buna, Chemraz®, Markez®, Viton® and Viton® AED.
- 6.4 NACE compliant trims are as specified for special services.
- 6.5 Double piston effect seating available on one or both ends (DIB).
- 6.6 Special coatings for the exterior and interior of the valve are available per application.

MANUFACTURE

- 7.1 Valve exteriors on carbon steel valves shall be coated with a rust inhibiting coating.
- 7.2 Valve shall be seat and shell tested in accordance with API 6D requirements.
- 7.3 Valve shall be cycle tested and stops set for manual, pneumatic or electric actuators.
- 7.4 QuadroSphere® Ball Valve shall be Val-Matic Model 4700, Trunnion Mounted Ball Valve as manufactured by Val-Matic® Valve & Mfg. Corporation, Elmhurst, IL, USA or approved equal.



QuadroSphere® Ball Valves

- Ener•G® Ball Valves
- Cam-Centric® Plug Valves
- American-BFV® Butterfly Valves
- Tilted Disc® Check Valves
- Silent Check Valves
- Sure Seal Foot Valves
- Swing-Flex® Check Valves
- Surgebuster® Check Valves
- Swing Check Valves
- Dual Disc® Check Valves
- Air Release Valves
- Air/Vacuum Valves
- Combination Air Valves
- FloodSafe® Inflow Preventer
- FrostSafe® Two-Way Damper
- VentSafe® Security Cage

VAL-MATIC®

Val-Matic Valve and Manufacturing Corp.

905 Riverside Drive, Elmhurst, IL 60126
Phone: 630-941-7600 • Fax: 630-941-8042
www.valmatic.com • valves@valmatic.com

Copyright © 2014 Val-Matic Valve & Mfg. Corp.
ISO 9001 Certified Company